

.100" × .100" Wiremount Socket

.050" Pitch Cable (Optional Plastic or Metal Strain Relief)

3000 Series



45

IMPORTANT NOTICE TO PURCHASER

ALL STATEMENTS, TECHNICAL INFORMATION AND RECOMMENDATIONS CONTAINED HEREIN ARE BASED ON TESTS WE BELIEVE TO BE RELIABLE, BUT THE ACCURACY OR COMPLETENESS THEREOF IS NOT GUARANTEED, AND THE FOLLOWING IS MADE IN LIEU OF ALL WARRANTIES, EXPRESSED OR IMPLIED:

SELLER'S AND MANUFACTURER'S ONLY OBLIGATION SHALL BE TO REPLACE SUCH QUANTITY OF THE PRODUCT PROVED TO BE DEFECTIVE. NEITHER SELLER NOR MANUFACTURER SHALL BE LIABLE FOR ANY INJURY, LOSS OR DAMAGE, DIRECT OR CONSEQUENTIAL, ARISING OUT OF THE USE OF OR THE INABILITY TO USE THE PRODUCT. BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR HIS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. NO STATEMENT OR RECOMMENDATION NOT CONTAINED HEREIN SHALL HAVE ANY FORCE OR EFFECT UNLESS IN AN AGREEMENT SIGNED BY OFFICERS OR SELLER AND MANUFACTURER.

TS-0718-03
Sheet 1 of 2

Date Issued: October 22, 1997

Physical

Insulation

Material: Glass Filled Polyester (PBT)
Flammability: UL 94V-0
Color: Gray

Contact

Material: Copper Alloy
Plating
Underplate & U-Slot: 100 μ " [2.54 μ m] Nickel — QQ-N-290, Class 2
Wiping Area: 30 μ " [0.76 μ m] Gold — MIL-G-45204, Type II, Grade C
Wire Accommodation: 26 & 28 AWG Solid or Stranded
Marking: 3M Logo, Part Identification Number and Orientation Triangle

Electrical

Current Rating: 1 A
Insulation Resistance: $> 1 \times 10^9 \Omega$ at 500 Vdc
Withstanding Voltage: 1000 Vrms at Sea Level

Environmental

Temperature Rating: -55°C to $+105^\circ\text{C}$

UL File No.: E68080

3M Electronic Products Division


6801 River Place Blvd.
Austin, TX 78726-9000

For technical, sales or ordering information call
800-225-5373




.100" × .100" Wiremount Socket

.050" Pitch Cable (Optional Plastic or Metal Strain Relief)

3000 Series

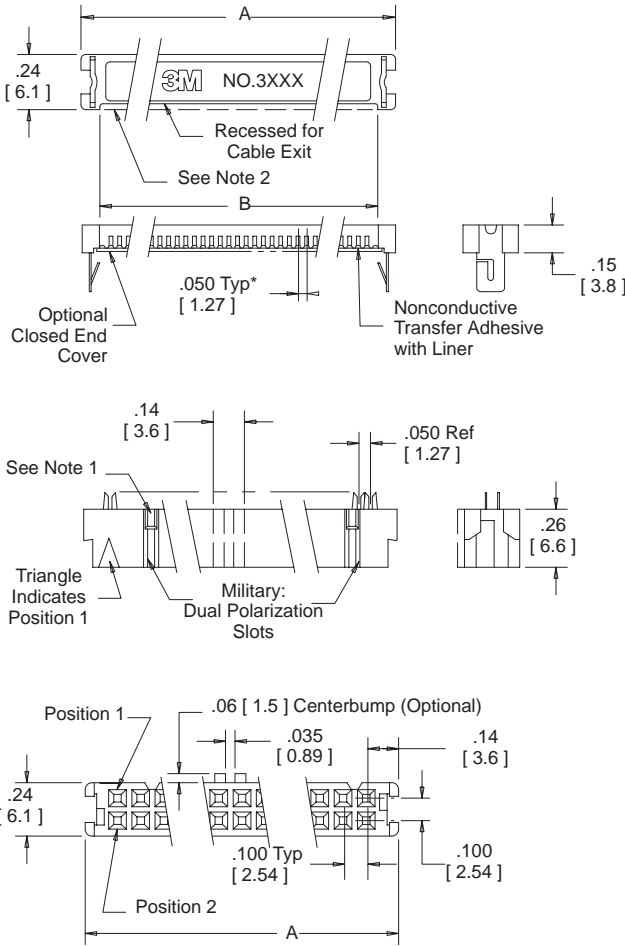

Contact Quantity	Dimensions			
	Socket Series	A	B	C
10	3473	0.68 [17.3]	0.54 [13.7]	0.62 [15.7]
14	3385	0.88 [22.4]	0.74 [18.8]	0.82 [20.8]
16	3452	0.98 [24.9]	0.84 [21.3]	0.92 [23.4]
20	3421	1.18 [30.0]	1.04 [26.4]	1.12 [28.4]
24	3626	1.38 [35.1]	1.24 [31.5]	1.32 [33.5]
26	3399	1.48 [37.6]	1.34 [34.0]	1.42 [36.1]
30	3419	1.68 [42.7]	1.54 [39.1]	1.62 [41.1]
34	3414	1.88 [47.7]	1.74 [44.2]	1.82 [46.2]
36	9436	1.98 [50.3]	1.84 [46.7]	1.92 [48.8]
40	3417	2.18 [55.4]	2.04 [51.8]	2.12 [53.8]
44	9444	2.38 [60.5]	2.24 [56.9]	2.32 [58.9]
50	3425	2.68 [68.1]	2.54 [64.5]	2.62 [66.5]
60	3334	3.18 [80.8]	3.04 [77.2]	3.12 [79.2]

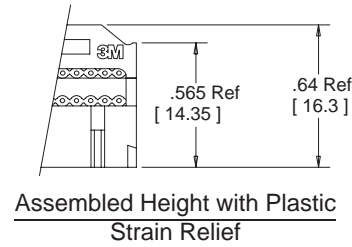

Notes:

1. This polarizing groove is non-existent on 3385 and 3473 Series.
2. The optional high cable-profile cover for cable thicker than .040 [1.02] (does not have cable exit recess).
3. The low profile strain relief can be used with the 4600 Series Plug and .1 x .1 Headers with ejector latches. The latches will only function as an ejector.
4. See TS-0721 for mating post pattern.

Tolerance Unless Noted			
	.0	.00	.000
Inch	± .1	± .01	± .005

[] Dimensions for Reference only

Ordering Information

Sockets XXXX-XXXX

Socket Series:
See Table for
3M Part Number

Polarization:
0 = Military (Dual Slot)
6 = Centerbump and
Military

Strain Relief:
00 = No Strain Relief
06 = Strain Relief (Metal)
XX = "Contact Quantity"
for Plastic
Strain Relief
(i.e. 50 for a 50
Position Strain Relief)

Cover:
6 = Open End
(For Daisy Chaining or Bussing)
7 = Closed End
(For End Cable Termination)
8 = Open End for Higher Profile Cables
(60 Pos Only)
9 = Closed End for Higher Profile Cables
(60 Pos Only)

Strain Relief (Order Separately) 3448-X0XX

Type:
2 = Low Profile
(Metal)
3 = Plastic

XX = "Contact Quantity"
See Table
(i.e. 50 for
a 50 Position
Strain Relief)

See TS-0720

Keying Plug (Order Separately) 3435-0

Pull Tabs (Order Separately) 3490-X

TS-0718-03
Sheet 2 of 2

3M Electronic Products Division

6801 River Place Blvd.
Austin, TX 78726-9000

For technical, sales or ordering information call
800-225-5373