

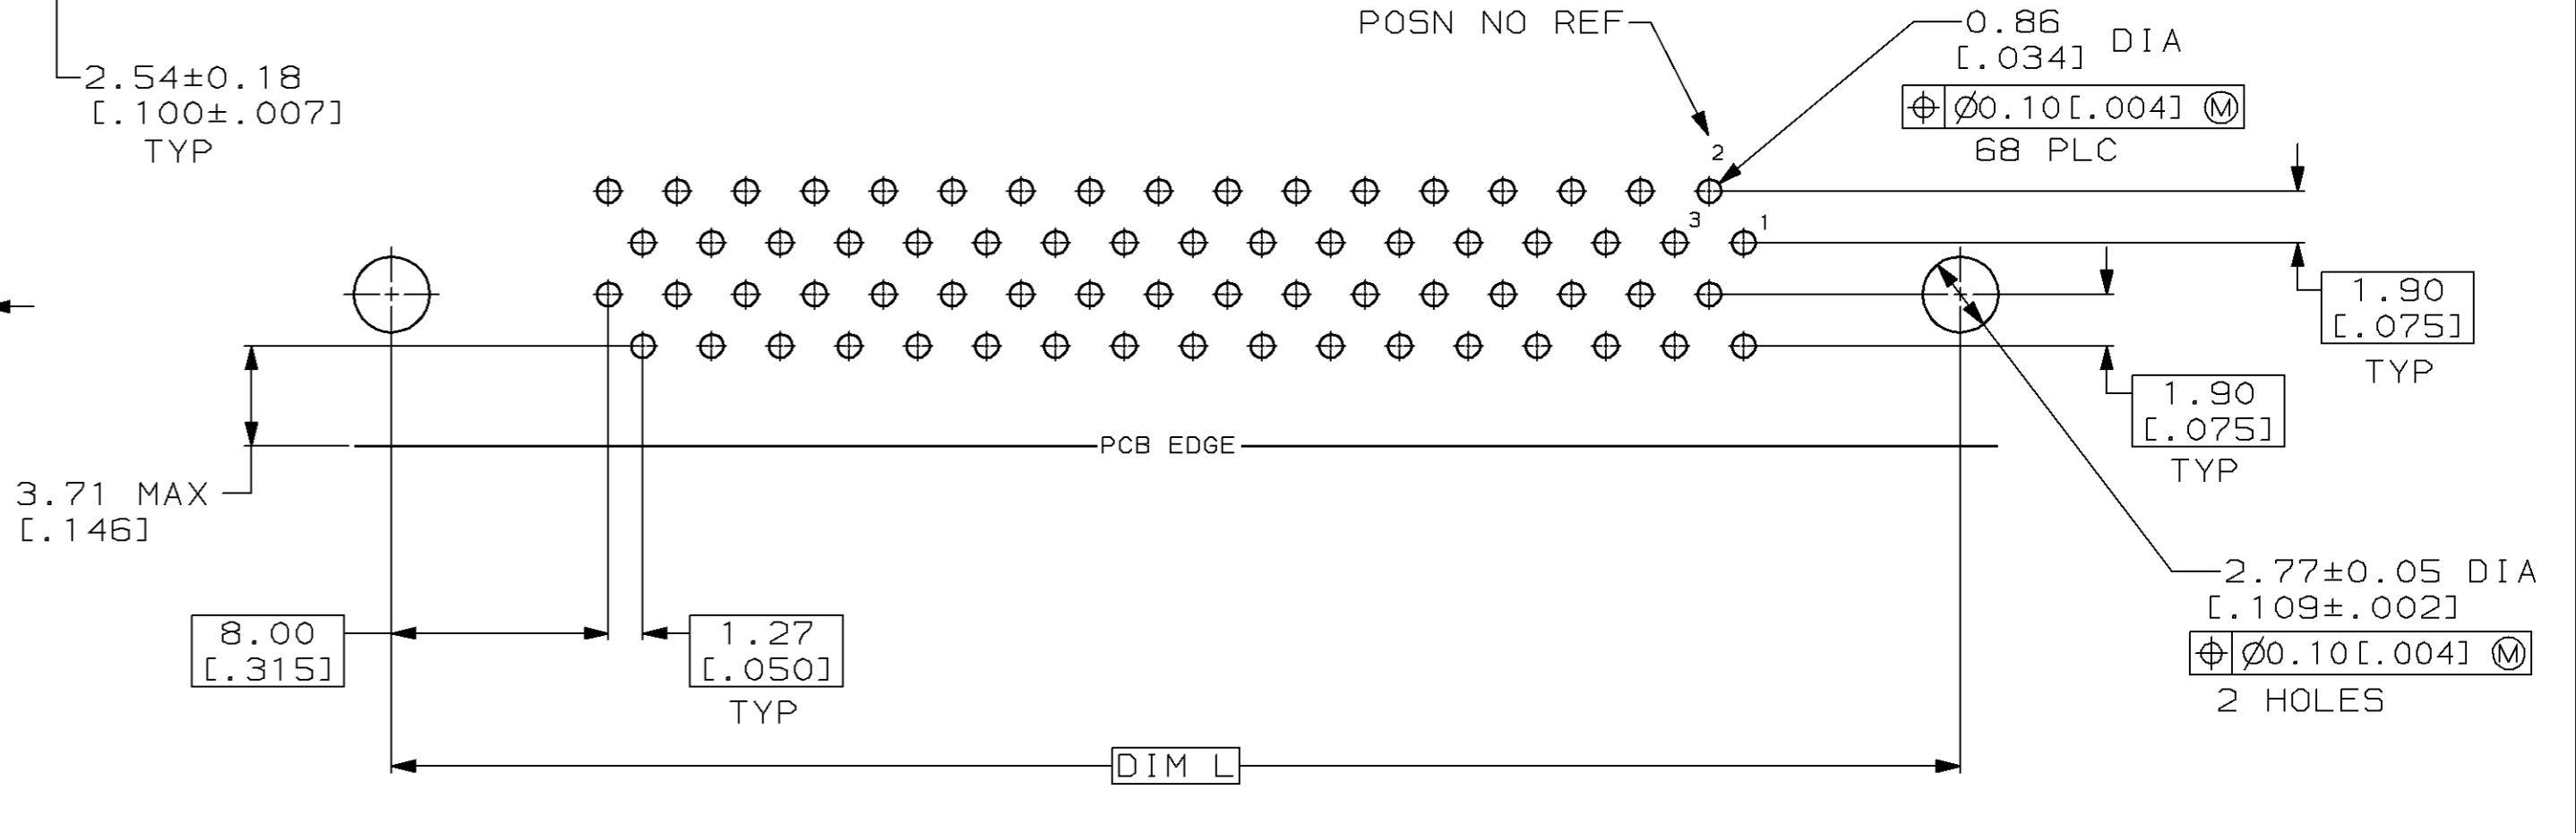
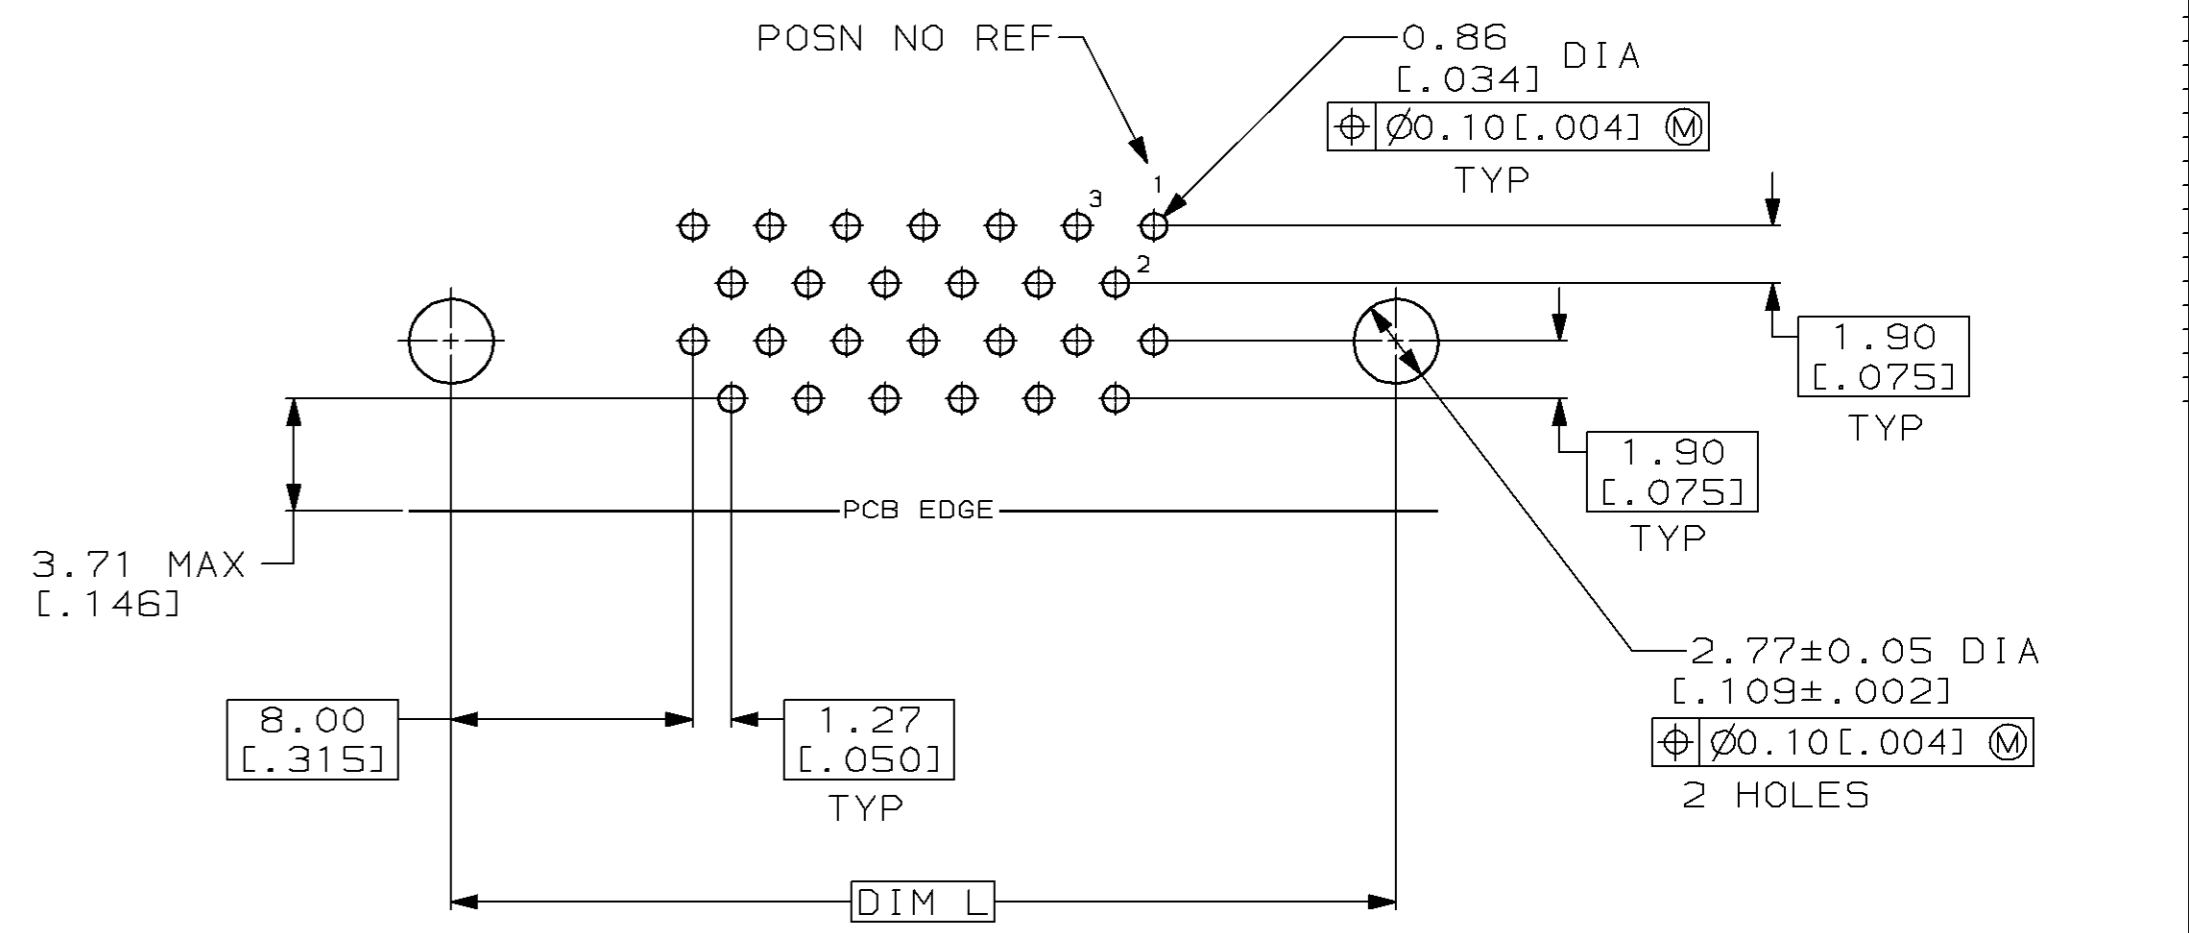


LOC		DIST		P		F		ZONE		LTR		REVISIONS			
BD	95											DESCRIPTION	DATE	APPD	
												M	050LETE -3 PER EC 0410-173-96	21 AUG 97	RW
												N	REV PER EC 0410-324-97	04 DEC 97	RW

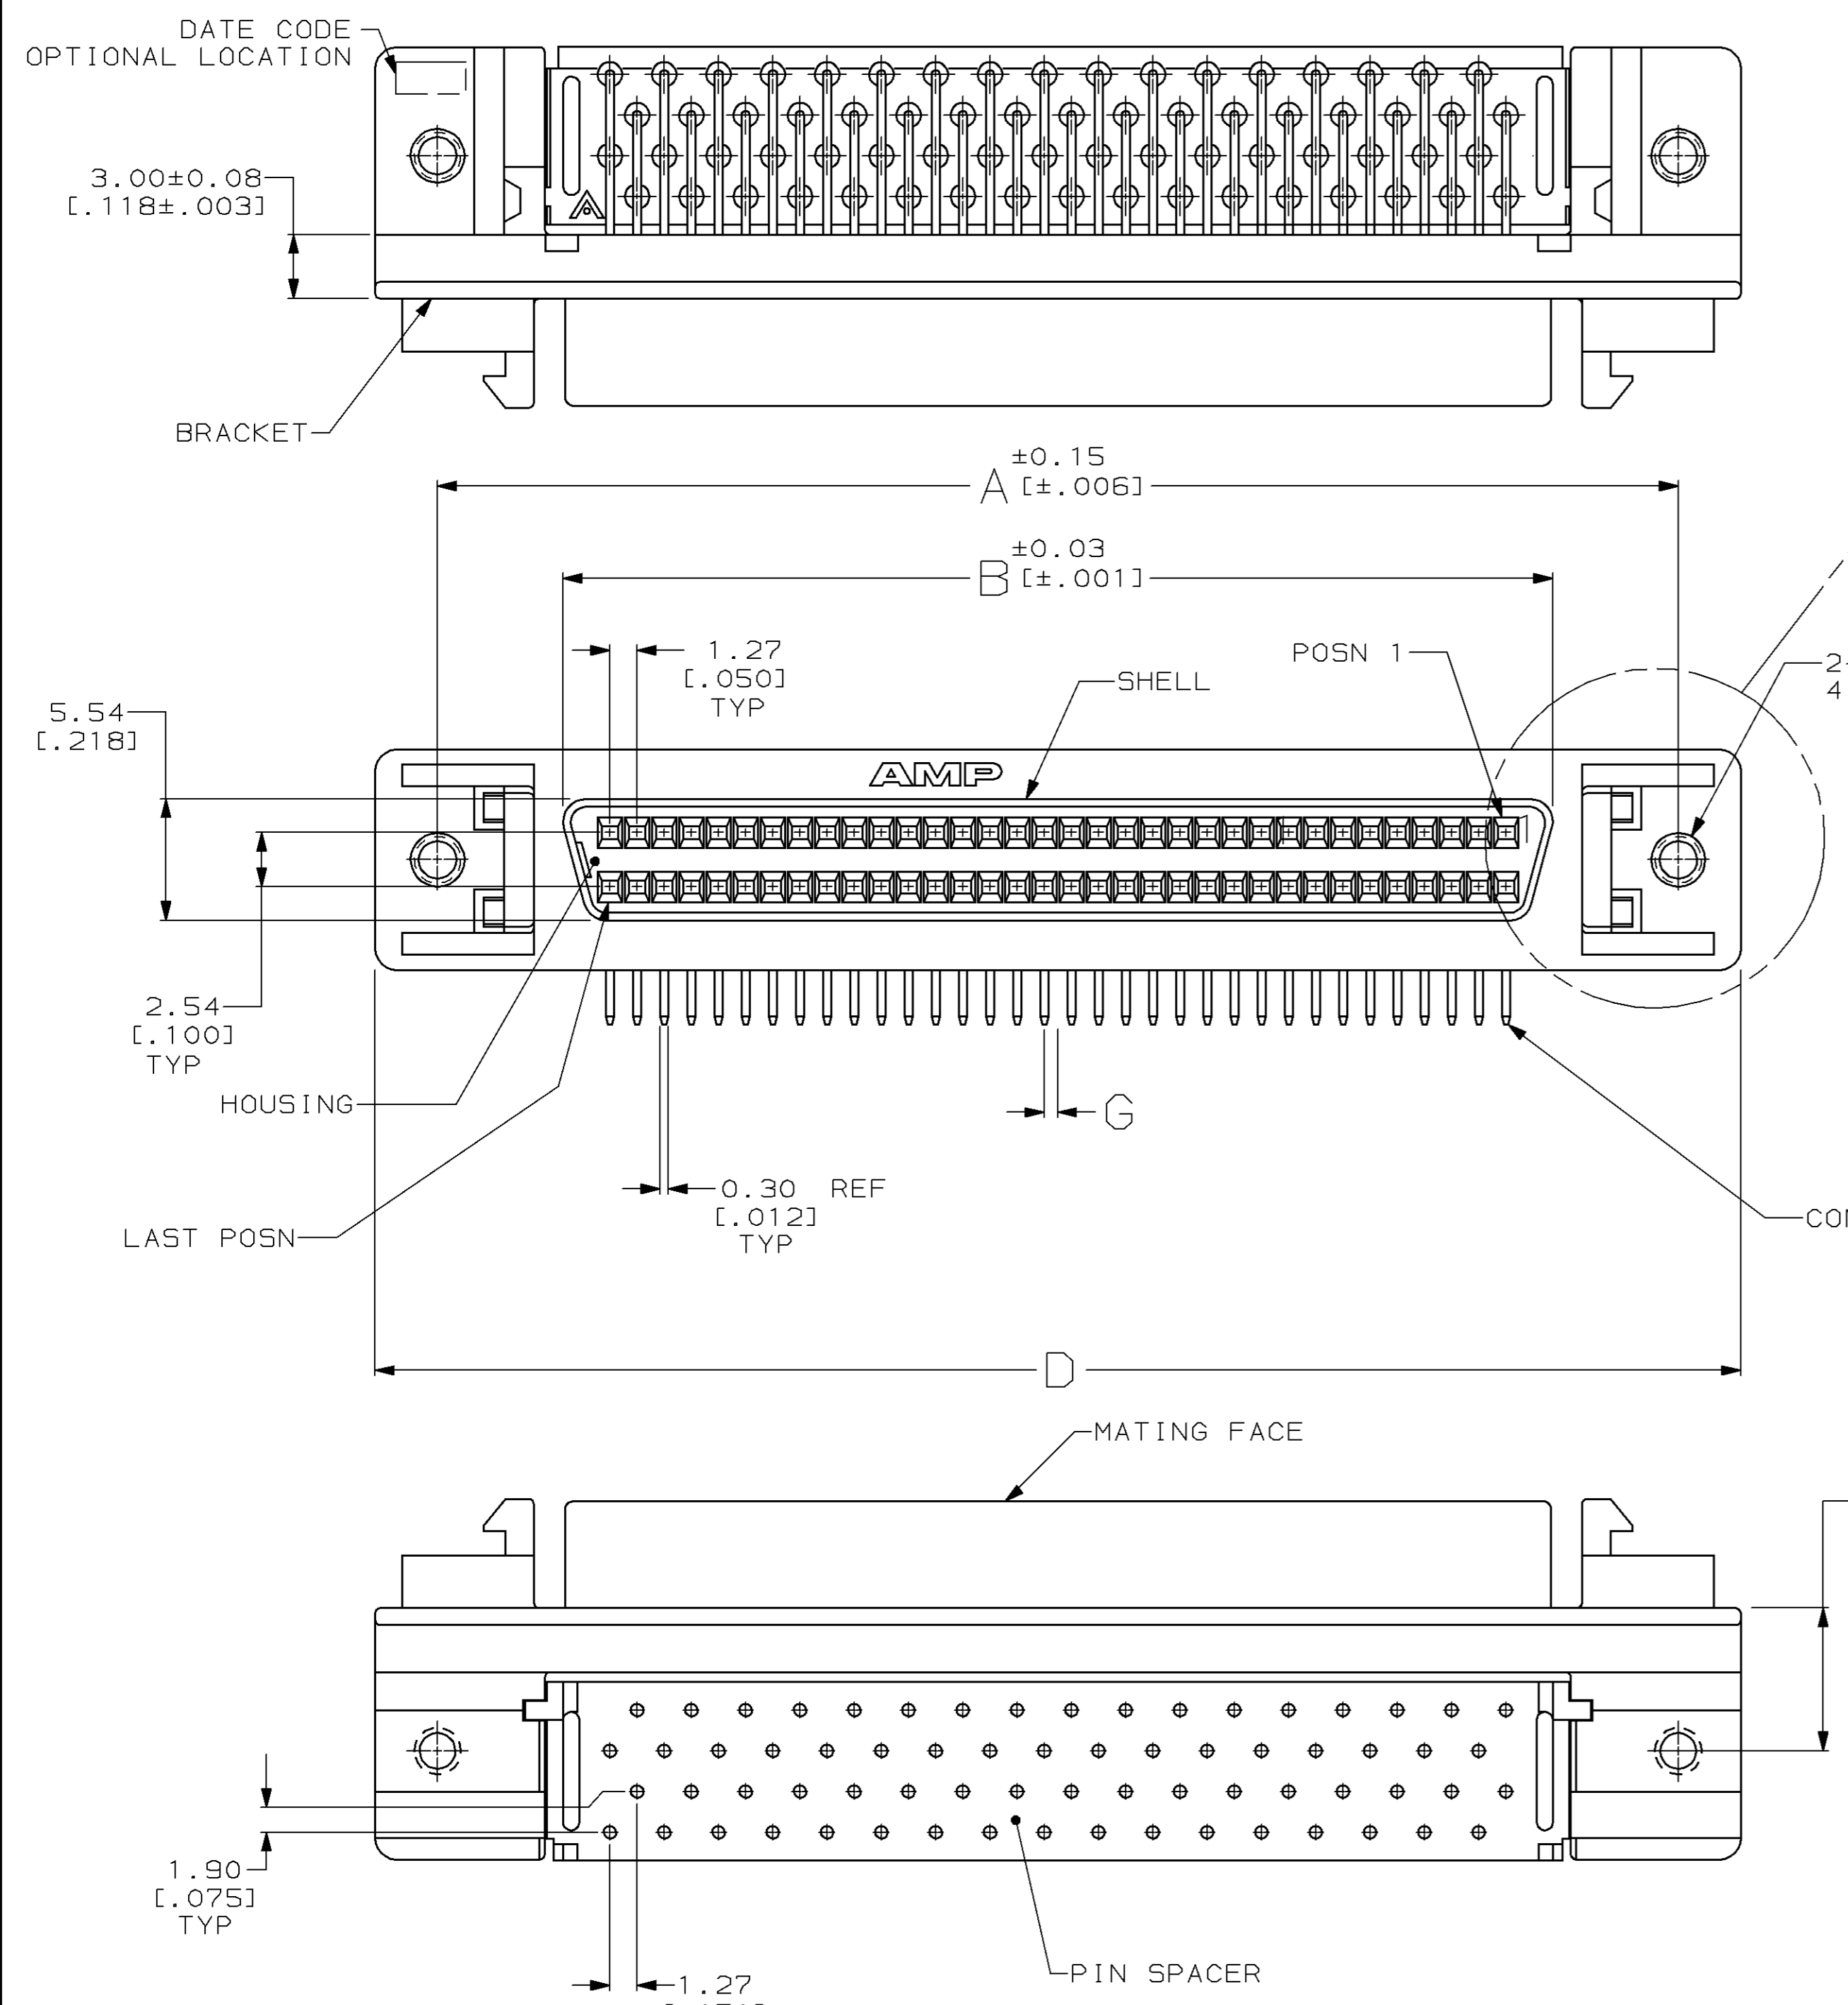

PC BOARD PATTERN	R	P	L	G	F	E	D	B	A	NO OF POSN	PART NUMBER
										80	787190-8
										68	787190-7
										50	787190-5
OBSOLETE										28	787190-3
										26	787190-2
										20	787190-1

- ① 0.76µm [.000030] MIN GOLD FOR A LENGTH OF 0.64 [.025] MAX, 0.13 [.005] MIN FROM MATING END, 3.81µm [.000150] MIN TIN-LEAD ON OPPOSITE END FOR A LENGTH OF 2.72 [.107] MIN, BOTH OVER 1.27µm [.000050] MIN NICKEL.
- ② CONTACTS: PHOSPHOR BRONZE; HOUSING & PIN SPACER: UL 94V-0 RATED, THERMOPLASTIC, BLACK; BRACKET: ZINC; SHELL: CARBON STEEL.
- ③ 5.08µm [.000200] MIN TIN OVER 1.27µm [.000050] MIN COPPER.
- ④ 2.54µm [.000100] MIN NICKEL OVER 5.08µm [.000200] COPPER.

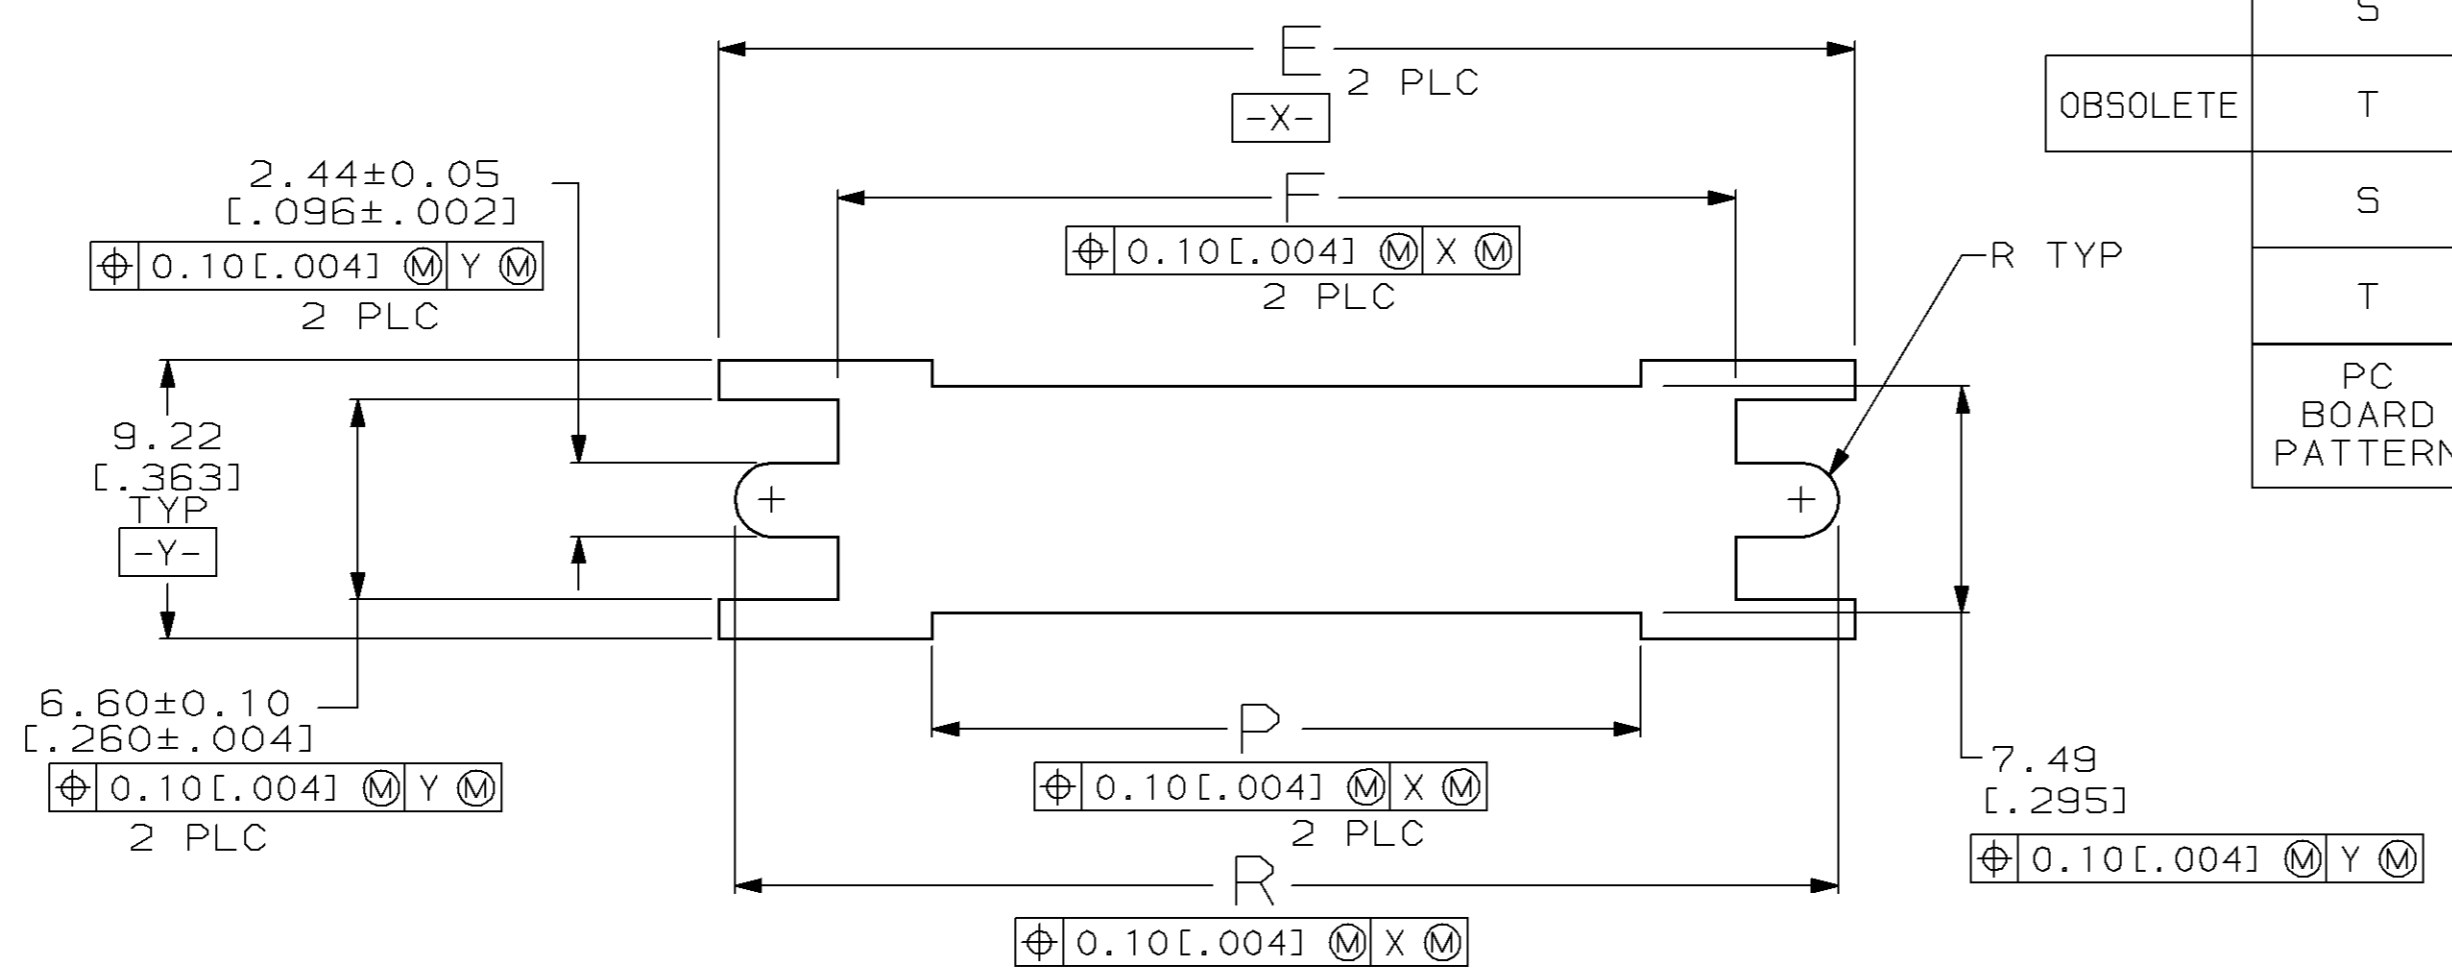

DO NOT SCALE PRINT.  
UNLESS SPECIFIED  
DIMENSIONS IN mm [INCHES]  
TOLERANCES ON:  
2 PLC DEC ± 0.13 [.005]  
3 PLC DEC ± -  
ANGLES ± -

DR 5-26-94  
D. BROCKWAY

CHK 5-26-94  
R. STONE

APPD 5-26-94  
R. WALTER

APPD 5-26-94  
R. WALTER

PRODUCT SPEC  
108-1228

APPLICATION SPEC  
114-40029

WEIGHT -

**AMP** AMP Incorporated  
Harrisburg, PA 17105-3608

NAME  
RECEPTACLE ASSEMBLY, SHIELDED,  
RIGHT ANGLE, RAILED,  
.050 SERIES, AMPLIMITE™

SIZE D  
CAGE CODE 00779  
DRAWING NO C=787190

SCALE 4:1  
SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.