

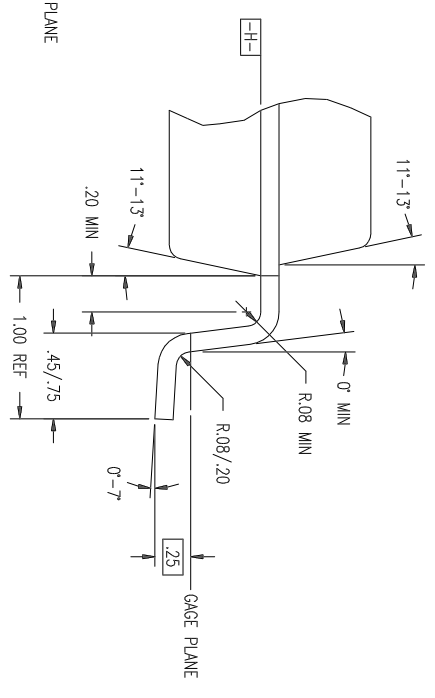
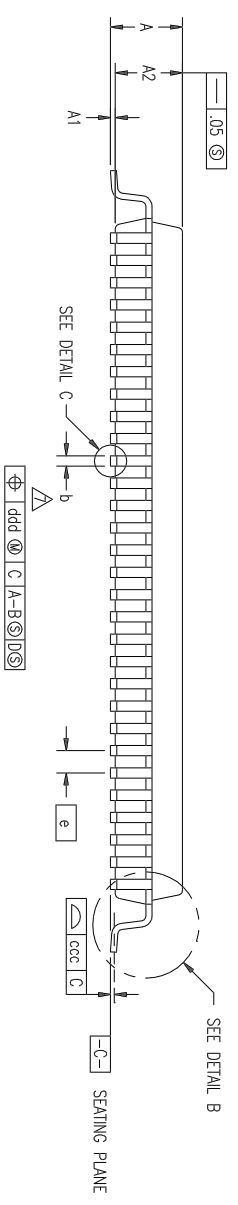
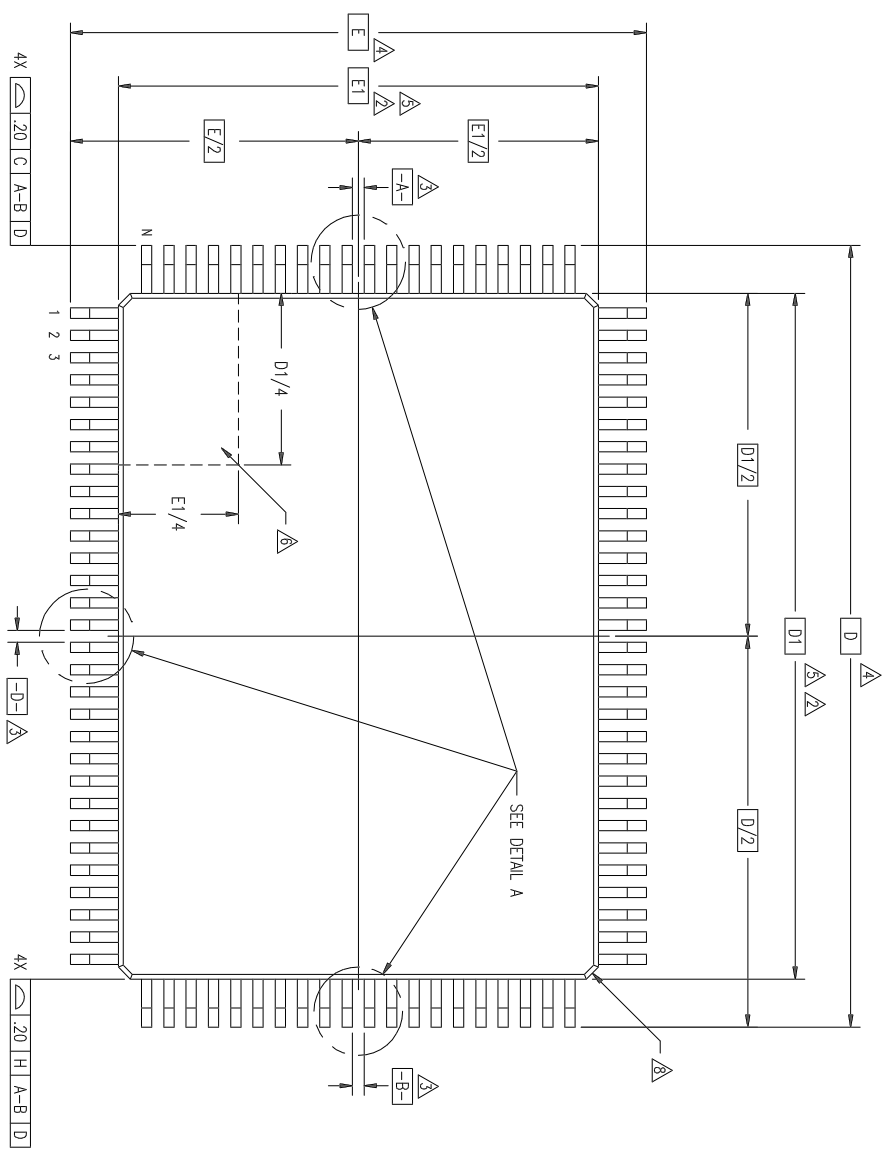


| REVISIONS | | | | |
|-----------|-----|------------------------|----------|----------|
| DCN | REV | DESCRIPTION | DATE | APPROVED |
| 26749 | 00 | INITIAL RELEASE | 08/09/94 | T. VU |
| 27389 | 01 | REDRAW TO JEDEC FORMAT | 12/12/94 | |

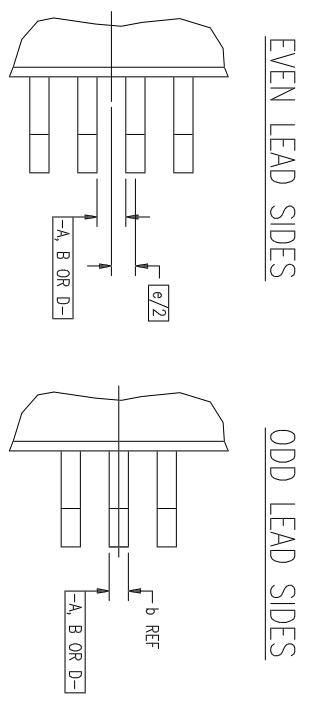

DETAIL B

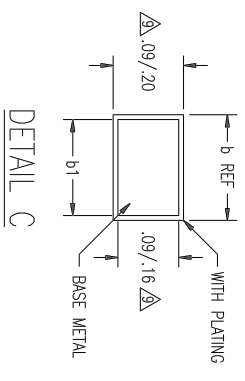

| | | | |
|-----------------------------|-------------|---|--------------|
| TOLERANCES UNLESS SPECIFIED | | Integrated Device Technology, Inc. | |
| DECIMAL | ANGULAR | 2975 Slender Way, Santa Clara, CA 95054 | |
| XXXX± | ± | PHONE: (408) 727-6116 | |
| XXXX± | | FAX: (408) 492-8574 | |
| XXXX± | | TNY: 910-338-2070 | |
| APPROVALS | DATE | TITLE | |
| DRAWN A44 | 08/09/94 | PK PACKAGE OUTLINE | |
| CHECKED | | 14.0 X 20.0 X 1.4 mm TOPP | |
| | | 1.00/.10 FORM | |
| SIZE | DRAWING No. | PSC-4045 | REV |
| C | | | 01 |
| DO NOT SCALE DRAWING | | | SHEET 1 OF 2 |


| REVISIONS | | | | |
|-----------|-----|------------------------|----------|----------|
| DCN | REV | DESCRIPTION | DATE | APPROVED |
| 26749 | 00 | INITIAL RELEASE | 08/09/94 | T. VU |
| 27389 | 01 | REDRAW TO JEDEC FORMAT | 12/12/94 | |

LAND PATTERN DIMENSIONS

| SYMBOL | JEDEC VARIATION DU | | | N D T E | JEDEC VARIATION BX | | | N D T E |
|--------|--------------------|-----------|------|---------|--------------------|-----------|------|---------|
| | MIN | NOM | MAX | | MIN | NOM | MAX | |
| A | - | - | 1.60 | | - | - | 1.60 | |
| A1 | .05 | .10 | .15 | | .05 | .10 | .15 | |
| A2 | 1.35 | 1.40 | 1.45 | | 1.35 | 1.40 | 1.45 | |
| D | | 22.00 BSC | | 4 | | 22.00 BSC | | 4 |
| D1 | | 20.00 BSC | | 5,2 | | 20.00 BSC | | 5,2 |
| E | | 16.00 BSC | | 4 | | 16.00 BSC | | 4 |
| E1 | | 14.00 BSC | | 5,2 | | 14.00 BSC | | 5,2 |
| N | | 100 | | | | 128 | | |
| ND | | 30 | | | | 38 | | |
| NE | | 20 | | | | 26 | | |
| e | | .65 BSC | | | | .50 BSC | | |
| b | .22 | .32 | .38 | 7 | .17 | .22 | .27 | 7 |
| b1 | .22 | .30 | .33 | | .17 | .20 | .23 | |
| ccc | - | - | .10 | | - | - | .08 | |
| ddd | - | - | .13 | | - | - | .08 | |

NOTES:

- 1 ALL DIMENSIONING AND TOLERANCING CONFORM TO ANSI Y14.5M-1982
- 2 TOP PACKAGE MAY BE SMALLER THAN BOTTOM PACKAGE BY .15 mm
- 3 DATUMS [A-B] AND [-D-] TO BE DETERMINED AT DATUM PLANE [-H-]
- 4 DIMENSIONS D AND E ARE TO BE DETERMINED AT SEATING PLANE [-C-]
- 5 DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE MOLD PROTRUSION IS .25 mm PER SIDE. D1 AND E1 ARE MAXIMUM BODY SIZE DIMENSIONS INCLUDING MOLD MISMATCH
- 6 DETAILS OF PIN 1 IDENTIFIER IS OPTIONAL BUT MUST BE LOCATED WITHIN THE ZONE INDICATED
- 7 DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION IS .08 mm IN EXCESS OF THE b DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT.
- 8 EXACT SHAPE OF EACH CORNER IS OPTIONAL
- 9 THESE DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN .10 AND .25 mm FROM THE LEAD TIP
- 10 ALL DIMENSIONS ARE IN MILLIMETERS
- 11 THIS OUTLINE CONFORMS TO JEDEC PUBLICATION 95 REGISTRATION MO-136, VARIATION DU AND BX

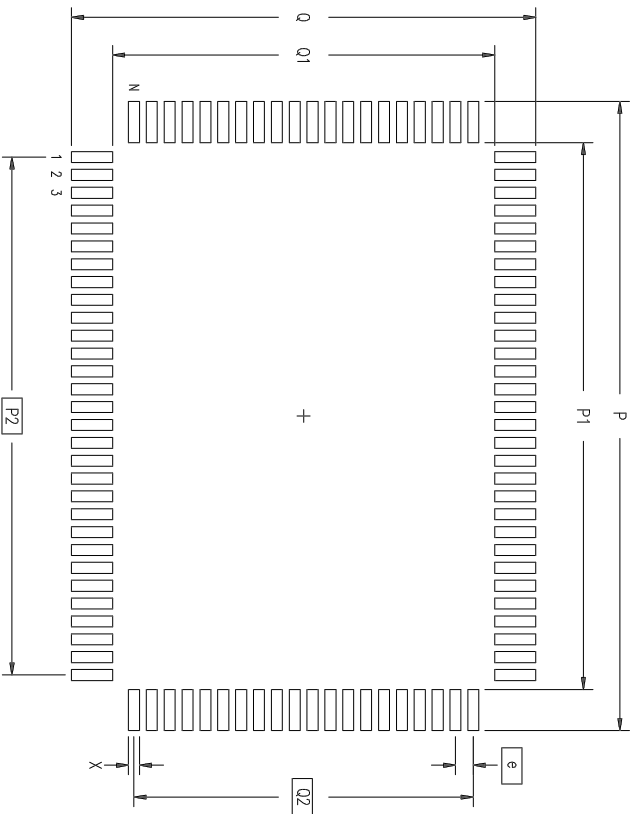

| | MIN | MAX | MIN | MAX |
|----|-------|-------|-------|-------|
| P | 22.80 | 23.00 | 22.80 | 23.00 |
| P1 | 19.80 | 20.00 | 19.80 | 20.00 |
| P2 | 18.85 | BSC | 18.50 | BSC |
| Q | 16.80 | 17.00 | 16.80 | 17.00 |
| Q1 | 13.80 | 14.00 | 13.80 | 14.00 |
| Q2 | 12.35 | BSC | 12.50 | BSC |
| X | .30 | .50 | .30 | .40 |
| e | .65 | BSC | .50 | BSC |
| N | 100 | | 128 | |

TOLERANCES
UNLESS SPECIFIED
DECIMAL ANGULAR ±

XXXX±

XXXX±

APPROVALS DATE TITLE

DRAWN *Ad* 08/09/94 14.0 X 20.0 X 1.4 mm TOPP

CHECKED 1.00/.10 FORM

SIZE DRAWING No. PSC-4045

DO NOT SCALE DRAWING SHEET 2 OF 2

Integrated Device Technology, Inc.
2975 Stender Way, Santa Clara, CA 95054
PHONE: (408) 727-6116
FAX: (408) 492-8574
TNY: 910-338-2070